



THE RIGID CORE FLOORING SOLUTION

TopJoy's rigid core portfolio is fashionable, durable and versatile - perfect for both residential spaces and commercial settings.

Easily floated over most existing floors, TopJoy's rigid core construction hides sub-floor imperfections and guarantees lasting performance.

Vibrant designs and textures combined with 100% waterproof planks provides a new floor look for years to come.







FEATURES & BENEFITS











Resistant



Resistant







SPECIFICATIONS:

CONSTRUCTION	Stone Polymer Composite (SPC)
SIZE	6"x48" (152x1220mm)
	7.25"x48" (184x1220mm)
	8"x48" (203x1220mm)
	9"x48" (230x1220mm
THICKNESS	4/ 5/ 6/ 7/ 8mm (Customized)
WEAR LAYER	0.2/ 0.3/ 0.5/ 0.7mm (Customized)
EDGE PROFILE	Beveled
INSTALLATION	Unipush





Royal court series



Royal court series RC 05 RC 07





RC 09







RC 12

RC 08



Kingdom series









Kingdom series









Kingdom series -









KD 12



Urban lifestyle series



Urban lifestyle series









Urban lifestyle series



UL 09



UL 10



Villa caprisi series



/C 01



/C.02



/C 03



VC 04

Villa caprisi series



VC 05



VC 06



VC 07



VC 08

Villa caprisi series



VC 09



VC 10



VC 11



VC 12



Composer maestro series



M 01



M 02



 $M \Omega 3$



CM 04

Composer maestro series









Composer maestro series



CM 09





CM 11



CM 12



Mountain country series









Mountain country series



MT 05



MT 06



VAT UZ



MT 08

Mountain country series



ΛT 09



MT 10



MT 11



MT 12



Savanna collection series









Savanna collection series









Savanna collection series -









SC 12



Timbertop lifestyle series









TI O

Timbertop lifestyle series










Timbertop lifestyle series





TL 10

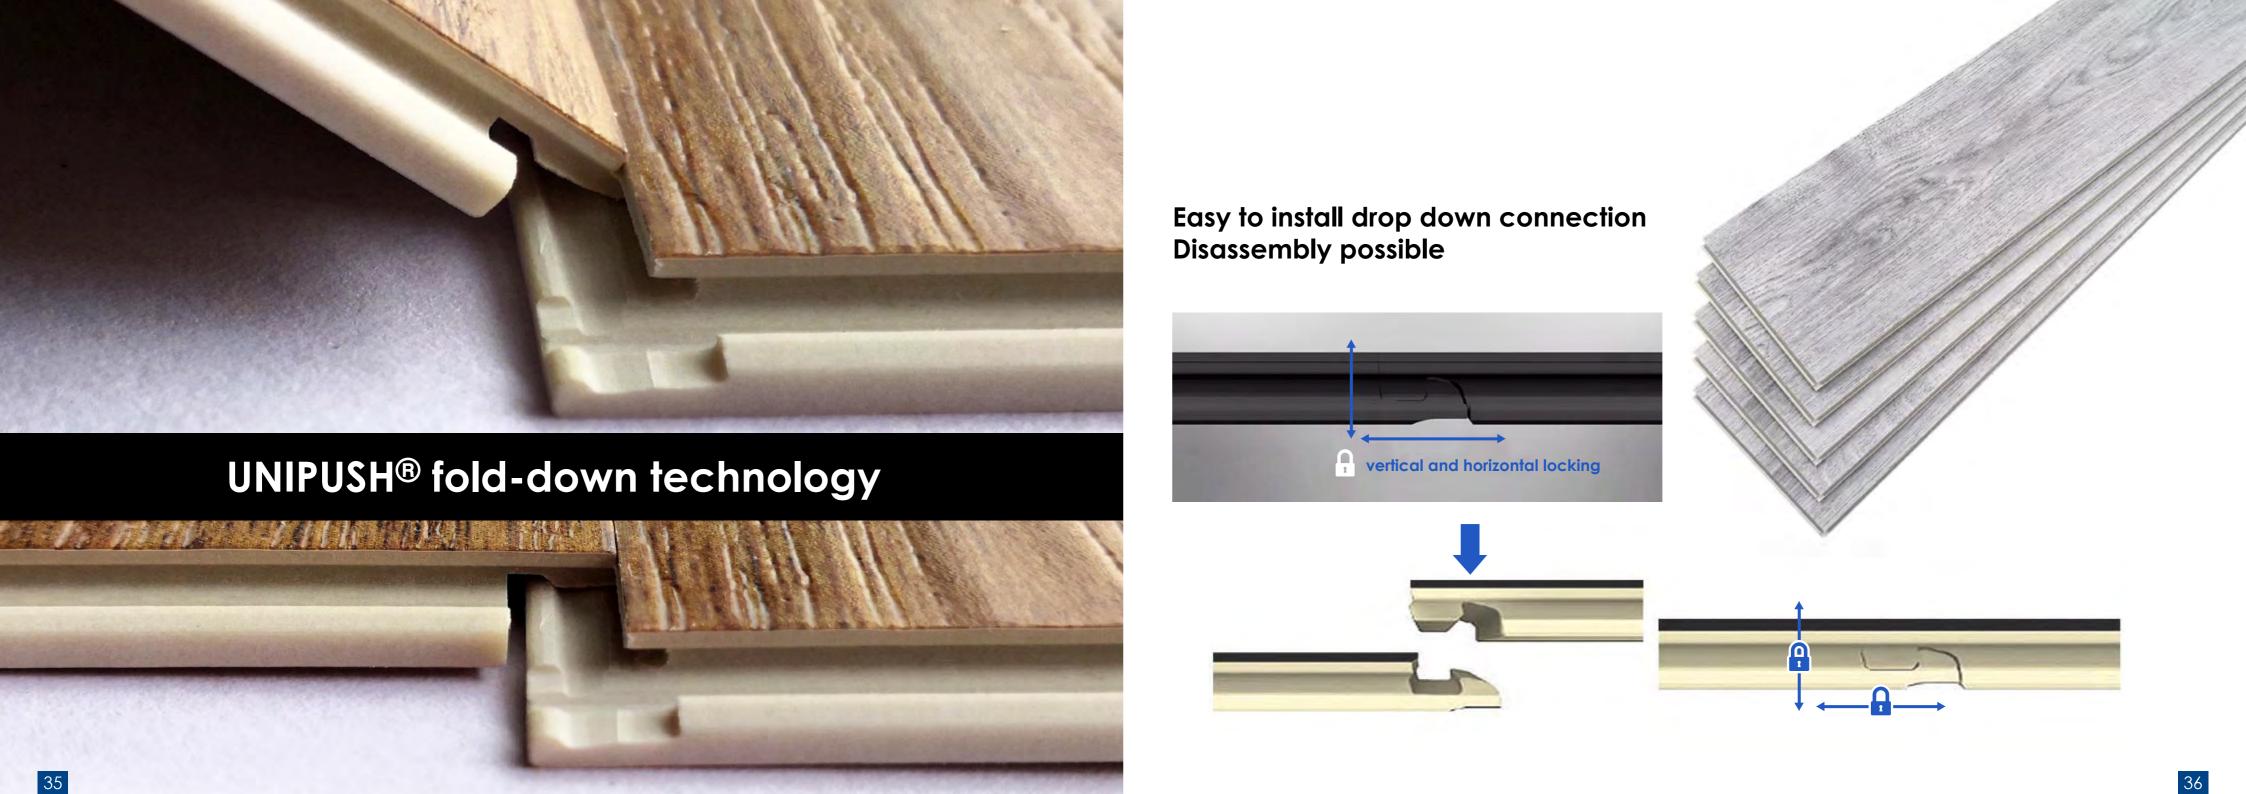



DESCRIPTION

Product	line
---------	------

Stone polymer composite (SPC) Construction Interlocking installation system, with the patented unipush technologies, Installation natural and classic patterns ASTM F1700, class III type B Class Low gloss Gloss **Embossed** Texture 4/ 5/ 6/ 7/ 8mm (Customized) Overall thickness Wear layer 0.2/ 0.3/ 0.5/ 0.7mm (Customized) Size 6" x 48" (152 x1220mm) 7.25" x 48" (184 x1220mm) 8" x 48" (203 x1220mm) 9" x 48" (230 x1220mm) UV protection: Provide outstanding resistance to everyday use

WARRANTY

25 years Residential warranty Commercial warranty 10 years

PERFORMANCE		
Dimentional stability/ EN ISO 23992	Passed	
Abrasion resistance/ EN 660-2	Passed	
Sound rating	67 STC	
Slip resistance/ DIN 51130	Passed	
Heat resistance/ EN 425	Passed	
Static load/ EN ISO 24343	Passed	
Wheel caster resistance/ Pass EN 425	Passed	
Impact insulation class	73 IIC	
Chemical resistance/ EN ISO 26987	Passed	
Smoke density/ EN ISO 9293/ EN ISO 11925	Passed	

ENVIRONMENTAL	
Micro-organism resistance/ EN14372	Passed
Recycling	100% Recyclable
Low emitting material/ EN71-3	Passed
Plants certifications	ISO 9002, ISO14001, OHSAS 18001
Health and safety	In compliance with CE regulation

