

· 品质铸就未来 ·



LUZHONG

鲁中系列产品

SERIES PRODUCTS

鲁中-1804

山东潍坊鲁中拖拉机有限公司

Shandong Weifang Luzhong Tractor Co.,Ltd.



LUZHONG

公司简介

Company profile

Established in 1996, located in the World Kite Capital, Weifang City, where transportation is convenient and manufacturing is developed, Shandong Weifang Luzhong Tractor Co., Ltd is engaged in developing and researching, manufacturing, selling and service of agricultural tractors; The company covers an area of 145,000 square meters, with registered capital of CN Yuan50,000,000, and fixed assets of CN Yuan420,000,000.

Main products include "Luzhong" brand various kinds of agricultural tractors, such as belt drive series (from 18horsepower to 28 horsepower), small and medium sized four wheel tractor series (25ps to 65ps), large sized wheel tractor series (70ps-260ps), garden tractor series (25ps to 75ps), and paddy field tractor series, etc. All tractors are equipped with China well-known brand diesel engines, such as Weichai, YTO, Yuchai, LD, ChangChai, Quanchai, etc., compared with others, the engines have the advantages of strong power, large torque reservation, and low fuel consumption, can suit various operating environment, meet the requirement of different users.

The company has a powerful technological team and skilled workers, owns advanced processing machine tools, horizontal CNC machining center, fiber laser cutting machine, sheet metal process machine, plasma cutting machine, welding robot, and advanced assembly lines etc. the designed production ability is 300,000 sets of various kinds of tractors. In 2016, the annual outputs reached 100,000 standard sets.

During the last 20 years, the company has been insisted on technological innovation, introducing advanced technique and process, which promotes the company developing step by step, and won high reputation among the same industry and the users: more than 30 patents, national high-tech enterprise, China Well-Known Trademark, Shandong Provincial Customer Satisfaction Enterprise; The company has passed through ISO9001:2008 quality system certification and China Compulsory Certification(CCC), Model Luzhong-404, 550, 800, 804, 1000 tractors got approval of OECD.

The Tractors are well sold in China and exported to Asia, Africa, Eastern Europe, North America, South America and Australia, etc. more than 80 countries and regions.

Shandong Weifang Luzhong Tractor Co., Ltd. will insist on the idea of Take personnels as essential, Creative and Innovative, pursuing excellence, to supply better products and service for all over the world. Welcome to cooperate with us and WIN-WIN.

Europe



LUZHONG

LUZHONG TRACTOR

Belt Drive Series

- ▶ 6+1 or 8+2 gear box
- ▶ Side or Rear PTO
- ▶ Belt Drive
- ▶ 2WD or 4WD
- ▶ Mechanical Steering
- ▶ Hydraulic power steering(4WD)



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528 Fax: +86-536-8325538
Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>
E-mail: chinaluzhong@luzhongtlj.com

Luzhong Belt Drive Series Tractor >>>

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-200	Luzhong-240	Luzhong-354	
形式 Type		2WD	2WD	4WD	
额定牵引力 (N) Rated Traction		3822	5300	8500	
拖拉机主要尺寸(mm) Main Dimensions of Tractor	外廓尺寸 Overall Dimensions	长 Lenth	2630	2900	
		宽 Width	1170	1440	
		高 Height	1290	1800	
	轴距 Wheel Base		1400	1500	1680
	轮距 Tread	前轮 Front Wheel	900	1140	1240
		后轮 Rear Wheel	960	1200	1300
最小离地间隙 Min.Ground Clearance		295	316	320	
发动机 Engine	型号 Model	LD1115ED	KM138	T35	
	型式 Type	单缸、卧式、四冲程、直喷式 1-Cylinder Level 4-stroke Direct Injection			
	标定功率 (kw) Rated Power	14.7	17.6	25.7	
	标定转速 (r/min) Rated Rev.	2200	2200	2300	
	使用燃料 Fuel	柴油 Diesel			
轮胎 Tire	前轮 Front Wheel	4.50-14	4.50-16	7.50-16	
	后轮 Rear Wheel	7.50-20	8.30-24	9.5-24	
离合器 Clutch		干式、单片、常结合 Dry-friction, single disc, constant mesh			
转向器 Steering		蜗轮蜗杆 Wrom and worm wheel		液压转向 power steering	
变速箱 Transmission Box		(3x2)+1 机械式 (3x2)+1 Mechanic	(4+1)X2机械式 (4+1)X2 Mechanic	(4+1)X2机械式 (4+1)X2 Mechanic	
悬挂装置类型 Hitching Type		后置三点悬挂0或1类 rear mounted, 3-point linkage, catagory 0 or I			
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	侧置 1250 Side PTO, 1250rpm	后置、半独立式 540 rear mounted, semi-independent, 540		
	花键尺寸 Spline Size		I35矩形花键6齿 I35 Rectangle Spline with 6 teeth		

随技术进步，产品结构、参数将不断改进，恕不另行通知。

Structure and specification are subject to change without notice.





LUZHONG

LUZHONG TRACTOR

Luzhong TY Series

- ▶ 3-cylinder engine
- ▶ Power Steering
- ▶ Multi-valve hydraulic output
- ▶ PTO Rev.540/1000rpm
- ▶ Wheel Tread adjusted steplessly
- ▶ Shuttle gear optional



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528 Fax: +86-536-8325538

Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>

E-mail: chinaluzhong@luzhongtlj.com

Luzhong254-304系列拖拉机 Series Tractor >>>

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-254	Luzhong-264	Luzhong-304	
型式 Type		4×4轮式 Wheeled Type, 4WD			
整机尺寸 (mm) Dimensions of Tractor	长 Length	3250			
	宽 Width	1450			
	高 Height	2030			
	轮距 Tread	前轮 Front Wheel	960、1220(常用usual)		
		后轮 Rear Wheel	960、1160 (常用usual)、1200、1300		
	轴距 Wheel Base	1715			
最小离地间隙 Min. Ground clearance	300 (分动箱底部 the bottom of transfer case)				
最小使用质量 (kg) Min. operational Mass		1440			
发动机 Engine	型号 Model	KM385BT	KM385BT	KM390BT	
	型式 Type	直列、水冷、四冲程 Vertical, water cooled and 4-stroke			
	标定功率 (kw) Rated Power	18.4	19.1	22.1	
	标定转速 (r/min) Rated Rev.	2300	2400	2300	
	使用燃料 Fuel	柴油 Diesel			
轮胎 Tire	前轮 Front Wheel	6.00-16			
	后轮 Rear Wheel	9.50-24			
离合器 Clutch		干式、单片、双作用、常结合 Dry-friction, single disc, dual stage and constant engagement			
转向器 Steering		全液压 Hydraulic power steering			
变速箱 Transmission Box		(4+1) ×2组成式 (4+1) ×2 Composed			
悬挂装置类型 Hitching Type		后置三点悬挂1类 rear mounted, 3-point linkage, category I			
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	后置、半独立式 540/760或540/1000 rear mounted, semi-independent, 540/760 or 540/1000			
	花键尺寸 Spline Size	I35矩形花键6齿 I35 Rectangle Spline with 6 teeth			

随技术进步，产品结构、参数将不断改进，恕不另行通知。

Structure and specification are subject to change without notice.





LUZHONG

LUZHONG TRACTOR

Luzhong TY Series

- ▶ 4-cylinder engine
- ▶ Power Steering
- ▶ Multi-valve hydraulic output
- ▶ PTO Rev.540/1000rpm
- ▶ Wheel Tread adjusted steplessly
- ▶ Shuttle gear optional



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528 Fax: +86-536-8325538
Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>
E-mail: chinaluzhong@luzhongtlj.com

Luzhong354-454系列拖拉机 Series Tractor >>>

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-354	Luzhong-404	Luzhong-454	
型式 Type		4×4轮式 Wheeled Type, 4WD			
整机尺寸 (mm) Dimensions of Tractor	长 Length	3455	3700		
	宽 Width	1515	1615		
	高 Height	2040	2130		
	轴距 Tread	前轮 Front Wheel	960、1220(常用usual)		1250
		后轮 Rear Wheel	960、1160、1200 (常用usual)、1300		1200、1300 (常用usual)、1400
	轴距 Wheel Base	1835	2010		
	最小离地间隙 Min. Ground clearance	320(前桥底部 the bottom of front axle)	325 (转向横拉杆底部 the bottom of steering tie rod)		
最小使用质量 (kg) Min. Usage Mass		1700	2160		
发动机 Engine	型号 Model	4L22BT	ZN490BT	A495BT	
	型式 Type	直列、水冷、四冲程 Vertical, water cooled and 4-stroke			
	标定功率 (kw) Rated Power	25.7	29.4	33.1	
	标定转速 (r/min) Rated Rev.	2350	2300	2400	
	使用燃料 Fuel	柴油 Diesel			
轮胎 Tire	前轮 Front Wheel	6.50-16	8.3-20		
	后轮 Rear Wheel	11.2-24	12.4-28		
离合器 Clutch		干式、单片、双作用、常结合 Dry-friction, single disc, Dual-stage and constant engagement	干式单片双作用 dry-friction, single disc and dual-stage		
转向器 Steering		全液压 Hydraulic Power Steering			
变速箱 Transmission Box		(4+1) × 2 组成式 (4+1) × 2 Composed	2轴 4 × (2+1) 组成式 4 × (2+1) composed		
悬挂装置类型 Hitching Type		后置三点悬挂 1类 Rear mounted, 3-point linkage, Category I			
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	后置、半独立式 540/760 或 540/1000 Rear mounted, semi-independent, 540/760 or 540/1000			
	花键尺寸 Spline Size	I35 矩形花键 6齿 I35 Rectangle Spline with 6 teeth			

随技术进步，产品结构、参数将不断改进，恕不另行通知。

Structure and specification are subject to change without notice.





LUZHONG

LUZHONG TRACTOR

Luzhong TE Series

- Creeper gear
- Power Steering
- Multi-valve hydraulic output
- PTO Rev.540/1000rpm
- Wheel Tread adjusted steplessly



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528 Fax: +86-536-8325538

Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>

E-mail: chinaluzhong@luzhongtlj.com

Luzhong404-504系列拖拉机 Series Tractor >>>

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-404B	Luzhong-454B	Luzhong-504B	
型式 Type		4×4轮式 Wheeled Type, 4WD			
整机尺寸 (mm) Dimensions of Tractor	长 Length	3340		3515	
	宽 Width	1590		1635	
	高 Height	2020		2130	
	轮距 Tread	前轮Front Wheel	1280		
		后轮Rear Wheel	1120-1320		
	轴距 Wheel Base	1800		1920	
最小离地间隙 Min. Ground Clearance	320 (前桥中部下沿 the bottom of front axle)				
最小使用质量 (kg) Min. operational Mass		1510	1510	1760	
发动机 Engine	型号 Model	4TE40	4TE45A	4TE50A	
	型式 Type	直列、水冷、四冲程 Vertical, water cooled and 4-stroke			
	标定功率 (kw) Rated Power	29.4	33.1	36.8	
	标定转速 (r/min) Rated Rev.	2400			
	使用燃料 Fuel	柴油 Diesel			
轮胎 Tire	前轮 Front Wheel	7.50-16			
	后轮 Rear Wheel	11.2-28			
离合器 Clutch		干式、单片、常结合 dry-friction, single disc and constant engagement			
转向器 Steering		全液压 Hydraulic Power Steering			
变速箱 Transmission Box		2轴 (4+1) ×2组成式 (4+1) ×2 composed			
悬挂装置类型 Hitching Type		后置三点悬挂1类 Rear mounted, 3-pointlinkage, Category I			
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	后置、非独立式 720或760或540/1000 Rear mounted, non-independent, 720 or 760 or 540/1000			
	花键尺寸 Spline Size	I35矩形花键6齿 I35 Rectangle Spline with 6 teeth			

随技术进步，产品结构、参数将不断改进，恕不另行通知。

Structure and specification are subject to change without notice.





LUZHONG

LUZHONG TRACTOR

- ▶ Oil Immersed Disc Brake
- ▶ Power Steering
- ▶ Multi-valve hydraulic output
- ▶ PTO Rev.540/1000rpm
- ▶ Wheel Tread adjusted steplessly

Luzhong TB Series



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528

Fax: +86-536-8325538

Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>

E-mail: chinaluzhong@luzhongtlj.com

Luzhong404-554系列拖拉机 Series Tractor >>>

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-404	Luzhong-454	Luzhong-504	Luzhong-554	
型式 Type		4×4轮式 Wheeled Type, 4WD				
整机尺寸 (mm) Dimensions of tractor	长 Length	3700				
	宽 Width	1615				
	高 Height	2130				
	轮距 Tread	前轮Front Wheel	1250			
		后轮Rear Wheel	1200、1300 (常用usual)、1400			
	轴距 Wheel Base	2010				
最小离地间隙Min. Ground Clearance	325 (转向横拉杆底部 the bottom of steering tie rod)					
最小使用质量 (kg) Min. operational Mass		2160				
发动机 Engine	型号 Model	ZN490BT	A495BT	4100T	4G33T	
	型式 Type	直列、水冷、四冲程 Vertical, water cooled and 4-stroke				
	标定功率 (kw) Rated Power	29.4	33.1	36.8	40.5	
	标定转速 (r/min) Rated Rev.	2300	2400	2300	2400	
	使用燃料 Fuel	柴油 Diesel				
轮胎 Tire	前轮 Front Wheel	8.3-20				
	后轮 Rear Wheel	12.4-28				
离合器 Clutch		干式、单片、双作用 dry-friction, single disc and dual-stage				
转向器 Steering		全液压 Hydraulic power steering				
变速箱 Transmission Box		2轴4× (2+1) 组成式 4× (2+1) composed				
悬挂装置类型 Hitching type		后置三点悬挂1类 Rear mounted, 3-point linkage, Category I				
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	后置、半独立式 540/760或540/1000 Rear mounted, semi-independent, 540/760 or 540/1000				
	花键尺寸 Spline Size	I38矩形花键8齿或I35矩形花键6齿 I38 Rectangle Spline with 8 teeth or I35 Rectangle Spline with 6 teeth				

随技术进步，产品结构、参数将不断改进，恕不另行通知。

Structure and specification are subject to change without notice.





LUZHONG

LUZHONG TRACTOR

- ▶ 4-cylinder engine
- ▶ Power Steering
- ▶ Multi-valve hydraulic output
- ▶ PTO Rev.540/1000rpm
- ▶ Wheel Tread adjusted steplessly

Garden Tractor Series



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528

Fax: +86-536-8325538

Home: chinaluzhong.en.alibaba.com

<http://www.luzhongtlj.com>

E-mail: chinaluzhong@luzhongtlj.com

Luzhong404A-504A系列拖拉机 Series Tractor > > >

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-404A	Luzhong-454A	Luzhong-504A	
型式 Type		4×4轮式 Wheeled Type, 4WD			
整机尺寸 (mm) Dimensions of Tractor	长 Length	3250		3350	
	宽 Width	1250		1300	
	高 Height	1260		2000	
	轮距 Tread	前轮 Front Wheel	960		
		后轮 Rear Wheel	900-1020		
	轴距 Wheel Base	1725		1840	
	最小离地间隙 Min. Ground clearance	210 (分动箱 the bottom of transfer case)			
最小使用质量 (kg) Min. operational Mass	1440		1840		
发动机 Engine	型号 Model	KM490BT1	M490T5	KM4100BT	
	型式 Type	直列、水冷、四冲程 Vertical, water cooled and 4-stroke			
	标定功率 (kw) Rated Power	29.4	33.1	36.8	
	标定转速 (r/min) Rated Rev.	2400		2300	
	使用燃料 Fuel	柴油 Diesel			
轮胎 Tire	前轮 Front Wheel	7.00-12 (6.00-12、6.00-16、5.00-12选装 Optional)			
	后轮 Rear Wheel	13.6-16 (9.50-20、9.50-24、9.50-16、7.50-20、11.2-24选装 Optional)			
离合器 Clutch		干式、单片、常结合 dry-friction, single disc and constant engagement			
转向器 Steering		全液压 Hydraulic Power Steering			
变速箱 Transmission Box		2轴 (4+1) ×2组成式 ((4+4)×2或 (4+1) ×2×2选装) two shafts, (4+1) ×2 composed ((4+4)×2 or (4+1) ×2×2 Optional)			
悬挂装置类型 Hitching Type		后置三点悬挂1类 Post Positioned 3-point linkage Category I			
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	后置、半独立式 540/760 (540/1000或720选装) Rear mounted, semi-independent, 540/760 (540/1000 or 720 Optional)			
	花键尺寸 Spline Size	I35矩形花键6齿 I35 Rectangle Spline with 6 teeth			

随技术进步，产品结构、参数将不断改进，恕不另行通知。

Structure and specification are subject to change without notice.





LUZHONG

LUZHONG TRACTOR

- ▶ Oil Immersed Disc Brake
- ▶ Power Steering
- ▶ Multi-valve hydraulic output
- ▶ PTO Rev.540/1000rpm
- ▶ Wheel Tread adjusted steplessly

Garden Tractor Series



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528

Fax: +86-536-8325538

Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>

E-mail: chinaluzhong@luzhongtlj.com

Luzhong554A-754A系列拖拉机 Series Tractor > > >

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-554A	Luzhong-604A	Luzhong-654A	Luzhong-754A	
型式 Type		4×4轮式 Wheeled Type, 4WD				
整机尺寸 (mm) Dimensions of Tractor	长 Length	3460			3740	
	宽 Width	1340				
	高 Height	2100				
	轮距 Tread	前轮Front Wheel	900-1060			
		后轮Rear Wheel	900-1060			
	轴距 Wheel Base	1840			2020	
	最小离地间隙 Min. Ground Clearance	240 (后桥底部 the bottom of rear axle)				
最小使用质量 (kg) Min. Operational Mass		1820			1950	
发动机 Engine	型号 Model	4G33T	QC4105T60	QC4108T65	4108T75	
	型式 Type	直列、水冷、四冲程 Vertical, water cooled and 4-stroke				
	标定功率 (kw) Rated Power	40.5	44.1	47.8	55.1	
	标定转速 (r/min) Rated Rev.	2400	2400		2400	
	使用燃料 Fuel	柴油 Diesel				
轮胎 Tire	前轮 Front Wheel	7.00-12 (6.50-16、6.00-16、6.00-12选装 Optional)				
	后轮 Rear Wheel	13.8/70-20 (12.4-20、11.2-24、11.2-20、9.50-24、9.50-20、9.50-16、7.50-20选装 Optional)				
离合器 Clutch		干式、单片、常结合 dry-friction, single disc and constant engagement				
转向器 Steering		全液压 Hydraulic Power Steering				
变速箱 Transmission Box		2轴 (4+4) × 2组成式, ((4+1) × 2, 4 × (2+1) × 2, (4+4) × 3, (2+1) × 4选装) (4+4) × 2 composed ((4+1) × 2, 4 × (2+1) × 2, (4+4) × 3, (2+1) × 4 Optional)				
悬挂装置类型 Hitching Type		后置三点悬挂1类 Rear mounted, 3-point linkage, category I				
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	后置、半独立式 540/760 (540/1000或720选装) Rear mounted, semi-independent, 540/760 (540/1000 or 720 Optional)			后置、独立式 540/760 (540/1000或720选装) Rear mounted, independent, 540/760 (540/1000 or 720 Optional)	
	花键尺寸 Spline Size	I38矩形花键8齿 I38 Rectangle Spline with 8 teeth				

随技术进步, 产品结构、参数将不断改进, 恕不另行通知。

Structure and specification are subject to change without notice.





LUZHONG

LUZHONG TRACTOR

- ▶ Dual stage clutch
- ▶ Oil Immersed Disc Brake
- ▶ Power Steering
- ▶ Multi-valve hydraulic output
- ▶ PTO Rev. 540/1000 or 540/760rpm
- ▶ Wheel Tread adjusted steplessly
- ▶ Shuttle gear

Luzhong TB Series



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528 Fax: +86-536-8325538
Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>
E-mail: chinaluzhong@luzhongtlj.com

Luzhong604-704系列拖拉机 Series Tractor >>>

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-604	Luzhong-654	Luzhong-704
型式 Type		4×4轮式 Wheeled Type, 4WD		
整机尺寸 (mm) Dimensions of Tractor	长 Length	3700		3800
	宽 Width	1615		1830
	高 Height	2130		2400
	轮距 Tread	前轮 Front Wheel	1250	
		后轮 Rear Wheel	1200、1300 (常用 usual)、1400、1500	1300 (常用 usual) -1500
		轴距 Wheel Base	2010	
最小离地间隙 Min. Ground clearance		325 (转向横拉杆底部 the bottom of steering tie rod)		
最小使用质量 (kg) Min. operational Mass		2360		
发动机 Engine	型号 Model	SL4105ABT-2	SL4105ABT-2	A4K43T70A
	型式 Type	直列、水冷、四冲程 Vertical, water cooled and 4-stroke		
	标定功率 (kw) Rated Power	44.1	47.8	51.5
	标定转速 (r/min) Rated Rev.	2300		
	使用燃料 Fuel	柴油 Diesel		
轮胎 Tire	前轮 Front Wheel	8.3-20		9.5-20 (8.3.-20,6.5-16,6.00-16, 7.00-12,6.00-12选装 Optional)
	后轮 Rear Wheel	12.4-28		14.9-28 (12.4-28,12.4-20,11.2-24,11.2- 20,9.50-24选装 Optional)
离合器 Clutch		干式、单片、双作用 Dry-friction, single disc and dual-stage		
转向器 Steering		全液压 Hydraulic Power Steering		
变速箱 Transmission Box		2轴4×(2+1)组成式 two shafts, 4×(2+1) composed		2轴(4+4)×3组成式 two shafts, (4+4)×3 composed ((4+4)×2, (4+1)×2, (2+1)× 4选装 Optional)
悬挂装置类型 Hitching Type		后置三点悬挂1类 Rear mounted, 3-point linkage, category I		
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	后置、半独立式 760/100 rear mounted, semi-independent, 760/1000		后置、半独立式 540/760(540/1000选装) rear mounted, semi-independent, 540/760 (540/1000 Optional)
	花键尺寸 Spline Size	I38矩形花键8齿 或 I35矩形花键6齿 I38 Rectangle Spline with 8 teeth or I35 Rectangle Spline with 6 teeth		

随技术进步，产品结构、参数将不断改进，恕不另行通知。

Structure and specification are subject to change without notice.





LUZHONG

LUZHONG TRACTOR

- ▶ Dual stage clutch
- ▶ Oil Immersed Disc Brake
- ▶ Power Steering
- ▶ Multi-valve hydraulic output
- ▶ PTO Rev. 540/1000 or 540/760rpm
- ▶ Wheel Tread adjusted steplessly
- ▶ Shuttle gear

Luzhong TA Series



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528

Fax: +86-536-8325538

Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>

E-mail: chinaluzhong@luzhongtlj.com

Luzhong754-854系列拖拉机 Series Tractor >>>

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-754	Luzhong-804	Luzhong-854	
型式 Type		4×4轮式 Wheeled Type, 4WD			
整机尺寸 (mm) Dimensions of Tractor	长 Length	4260			
	宽 Width	1900			
	高 Height	2690			
	轮距 Tread	前轮 Front Wheel	1450		
		后轮 Rear Wheel	1365、1396、1510 (常用usual)、1652、1765、1796		
	轴距 Wheel Base	2285			
最小离地间隙 Min. Ground clearance	360 (前桥底部the bottom of front axle)				
最小使用质量 (kg) Min. operational Mass		3100			
发动机 Engine	型号 Model	LR4B5-22		LR4M5-23	
	型式 Type	直列、水冷、四冲程 Vertical, water cooled and 4-stroke			
	标定功率 (kw) Rated Power	55.1	58.8	62.5	
	标定转速 (r/min) Rated Rev.	2200		2300	
	使用燃料 Fuel	柴油 Diesel			
轮胎 Tire	前轮 Front Wheel	8.3-24			
	后轮 Rear Wheel	14.9-30			
离合器 Clutch		干式、单片、双作用 dry-friction, single disc and dual-stage			
转向器 Steering		全液压 Hydraulic power steering			
变速箱 Transmission Box		IZ行星减速组成为式 IZ planetary deceleration composition type			
悬挂装置类型 Hitching Type		后置三点悬挂1类 Rear mounted, 3-point linkage, category I			
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	后置、半独立式 540/1000 rear mounted, semi-independent, 540/1000			
	花键尺寸 Spline Size	I38矩形花键8齿 I38 Rectangle Spline with 8 teeth			

随技术进步，产品结构、参数将不断改进，恕不另行通知。

Structure and specification are subject to change without notice.





LUZHONG

LUZHONG TRACTOR

Luzhong TD Series

- ▶ 4-cylinder engine
- ▶ Power Steering
- ▶ Multi-valve hydraulic output
- ▶ PTO Rev.540/1000rpm
- ▶ Wheel Tread adjusted steplessly
- ▶ Shuttle gear optional



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528 Fax: +86-536-8325538

Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>

E-mail: chinaluzhong@luzhongtlj.com

Luzhong904-1104系列拖拉机 Series Tractor >>>

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-904	Luzhong-954	Luzhong-1004	Luzhong-1104	
型式 Type		4×4轮式 Wheeled Type, 4WD				
整机尺寸 (mm) Dimensions of Tractor	长 Length	4300				
	宽 Width	2050				
	高 Height	2810				
	轴距 Tread	前轮Front Wheel	1610 (常用usual) 1710、1810、1950			
		后轮Rear Wheel	1608 (常用usual) 、1692、1796、1892、1996			
	轴距 Wheel Base	2200				
最小离地间隙 Min. Ground clearance	405 (前驱动桥下沿 the bottom of front driving axle)					
最小使用质量 (kg) Min. Usage Mass		3806				
发动机 Engine	型号 Model	LR4M5-23	LR4M3Z-23	LR4M3Z-23	LR4M3Z-23	
	型式 Type	直列、水冷、四冲程 Vertical, water cooled and 4-stroke				
	标定功率 (kw) Rated Power	66.2	69.9	73.5	81	
	标定转速 (r/min) Rated Rev.	2300				
	使用燃料 Fuel	柴油 Diesel				
轮胎 Tire	前轮 Front Wheel	12.4-24				
	后轮 Rear Wheel	16.9-34				
离合器 Clutch		干式、单片、双作用 dry-friction, single disc and dual-stage				
转向器 Steering		全液压 Hydraulic Power Steering				
变速箱 Transmission Box		4×(2+1)×2组成式 4×(2+1)×2 combined				
悬挂装置类型 Hitching Type		后置三点悬挂2类 Rear mounted, 3-point linkage, category II				
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	后置、独立式 760/1000 Rear mounted, independent, 760/1000				
	花键尺寸 Spline Size	I38矩形花键8齿 I38 Rectangle Spline with 8 teeth				

随技术进步，产品结构、参数将不断改进，恕不另行通知。

Structure and specification are subject to change without notice.





LUZHONG

LUZHONG TRACTOR

- ▶ Dual stage clutch
- ▶ Oil Immersed Disc Brake
- ▶ Power Steering
- ▶ Multi-valve hydraulic output
- ▶ PTO Rev.540/1000rpm
- ▶ Shuttle gear
- ▶ Creeper gear

Luzhong TC Series



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528

Fax: +86-536-8325538

Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>

E-mail: chinaluzhong@luzhongtlj.com

Luzhong1204-1304系列拖拉机 Series Tractor >>>

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-1204	Luzhong-1304	
型式 Type		4×4轮式 Wheeled Type, 4WD		
整机尺寸 (mm) Dimensions of Tractor	长 Length	4480		
	宽 Width	2050		
	高 Height	2570		
	轮距 Tread	前轮 Front Wheel	1610 (常用 usual)	
		后轮 Rear Wheel	1608 (常用 usual)	
	轴距 Wheel Base	2480		
最小离地间隙 Min. Ground clearance	405 (前驱动桥下沿 the bottom of front axle)			
最小使用质量 (kg) Min. operational Mass		3900		
发动机 Engine	型号 Model	LR6B5-23	LR6M5-23	
	型式 Type	直列、水冷、四冲程 Vertical, water cooled and 4-stroke		
	标定功率 (kw) Rated Power	88.2	95.6	
	标定转速 (r/min) Rated Rev.	2300		
	使用燃料 Fuel	柴油 Diesel		
轮胎 Tire	前轮 Front Wheel	12.4-24 (选装 Optional: 11.2-24、13.6-24、14.9-26)		
	后轮 Rear Wheel	16.9-34 (选装 Optional: 13.6-38、18.4-30)		
离合器 Clutch		干式、单片、双作用 Dry-friction, single disc and two stage		
转向器 Steering		全液压 Hydraulic Power Steering		
变速箱 Transmission Box		4×(2+1)×2组成式 4×(2+1)×2 Composed		
悬挂装置类型 Hitching Type		后置三点悬挂2类或3类 (选装) Rear mounted, 3-point linkage, category II or III (optional)		
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	后置独立式 760/1000或540/1000、540/760 (选装) rear mounted, independent, 760/1000 or 540/1000 or 540/760		
	花键尺寸 Spline Size	I38矩形花键8齿 I38 Rectangle Spline with 8 teeth		

随技术进步，产品结构、参数将不断改进，恕不另行通知。

Structure and specification are subject to change without notice.





LUZHONG

LUZHONG TRACTOR

Luzhong TF Series

- Dual stage clutch
- Oil Immersed Disc Brake
- Power Steering
- Multi-valve hydraulic output
- PTO Rev.540/1000rpm
- Shuttle gear
- Creeper gear



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528

Fax: +86-536-8325538

Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>

E-mail: chinaluzhong@luzhongtlj.com

Luzhong1404-1504系列拖拉机 Series Tractor >>>

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-1404	Luzhong-1504	
型式 Type		4×4轮式 Wheeled Type, 4WD		
整机尺寸 (mm) Dimensions of Tractor	长 Length	4670	4750	
	宽 Width	2490		
	高 Height	2800	3000	
	轮距 Tread	前轮Front Wheel	1740	1780
		后轮Rear Wheel	1800(常用usual)-2000	1860(常用usual)-2000
	轴距 Wheel Base	2550		
最小离地间隙 Min. Ground clearance	500 (前驱动桥下沿 the bottom of front axle)	480 (前驱动桥下沿 the bottom of front axle)		
最小使用质量 (kg) Min. operational Mass		5300	5900	
发动机 Engine	型号 Model	LR6M3Z-23	DEUTZ WP6G150E330	
	型式 Type	直列、水冷、四冲程 Vertical, water cooled and 4-stroke		
	标定功率 (kw) Rated Power	103	110.3	
	标定转速 (r/min) Rated Rev.	2300		
	使用燃料 Fuel	柴油 Diesel		
轮胎 Tire	前轮 Front Wheel	14.9-26 (选装Optional 14.9-24)		
	后轮 Rear Wheel	18.4-38 (选装Optional 16.9-38)		
离合器 Clutch		干式、单片、双作用 Dry-friction, single disc and dual-stage		
转向器 Steering		全液压 Hydraulic Power Steering		
变速箱 Transmission Box		4 × (2+1) × 2 组成式 4 × (2+1) × 2 Composed		
悬挂装置类型 Hitching Type		后置三点悬挂3类 Rear mounted, 3-point linkage, category III		
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	后置独立式760/1000 (选装540/1000或540/760) rear mounted, independent type 760/1000 (Optional 540/1000 or 540/760)		
	花键尺寸 Spline Size	I38矩形花键8齿 I38 Rectangle Spline with 8 teeth		

随技术进步，产品结构、参数将不断改进，恕不另行通知。

Structure and specification are subject to change without notice.





LUZHONG

LUZHONG TRACTOR

- ▶ Dual stage clutch
- ▶ Oil Immersed Disc Brake
- ▶ Power Steering
- ▶ Multi-valve hydraulic output
- ▶ PTO Rev.540/1000rpm
- ▶ Shuttle gear
- ▶ Creeper gear

Luzhong TG Series



山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528

Fax: +86-536-8325538

Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>

E-mail: chinaluzhong@luzhongtlj.com

Luzhong1604-1804系列拖拉机 Series Tractor >>>

主要技术参数 (Main Technical Specifications):

型号 Model		Luzhong-1604	Luzhong-1804	
型式 Type		4×4轮式 Wheeled Type, 4WD		
整机尺寸 (mm) Dimensions of Tractor	长 Length	5280		
	宽 Width	2270	2780	
	高 Height	3270		
	轮距 Tread	前轮 Front Wheel	1970	
		后轮 Rear Wheel	1700 ~ 2300(常用 usual 1800)	
	轴距 Wheel Base	2700		
最小离地间隙 Min. Ground clearance	450 (牵引板下沿 the bottom of drawbar)			
最小使用质量 (kg) Min. operational Mass		6610	6655	
发动机 Engine	型号 Model	LR6M3LU22/1177E	LR6M3LU22/1324E	
	型式 Type	直列、水冷、四冲程 Vertical, water cooled and 4-stroke		
	标定功率 (kw) Rated Power	117.7	132.4	
	标定转速 (r/min) Rated Rev.	2200		
	使用燃料 Fuel	柴油 Diesel		
轮胎 Tire	前轮 Front Wheel	16.9-28 (选装 Optional 14.9-28)	18.4-26 (选装 Optional 16.9-28)	
	后轮 Rear Wheel	18.4-42 (选装 Optionsal 18.4-38)	20.8-38 (选装 Optional 18.4-42) (选装后轮双排轮胎) (dual-row rear tyre is optional)	
离合器 Clutch		干式、单片、双作用 Dry-friction, single disc and dual-stage		
转向器 Steering		全液压 Hydraulic power steering		
变速箱 Transmission Box		(1+1) ×4×4 组成式 (1+1) ×4×4 Composed		
悬挂装置类型 Hitching Type		后置三点悬挂3类 Rear mounted, 3-point linkage, category III		
动力输出轴 PTO	类型和转速 (r/min) Type and Rev.	后置独立式540/1000 Rear mounted, independent type 540/1000		
	花键尺寸 Spline Size	I35矩形花键21齿 I35 Rectangle Spline with 21 teeth		

随技术进步，产品结构、参数将不断改进，恕不另行通知。

Structure and specification are subject to change without notice.





铧式犁 Furrow plough ▶

Model	1L-220	1L-320	1L-420	1L-520	1L-225	1L-325	1L-425
Number of furrows	2	3	4	5	2	3	4
Working width (m)	0.4	0.6	0.8	1	0.5	0.75	1
Working depth(mm)	200-250	200-250	200-250	200-250	200-250	200-250	200-250
Weight (kg)	80	115	145	180	125	228	330
Matched power (hp)	12	25-30	30	45-55	25	35	50
Linkage	3-point hitch	3-point hitch	3-point hitch	3-point hitch	3-point hitch	3-point hitch	3-point hitch



播种机 Seeder




圆盘犁 Disc Plough ▶

Model	Working width(m)	Weight (kg)	Dia of disc (mm)	Matched power(HP)
1LYQ(T)-220	0.4	150	510	≥18
1LYQ(T)-315	0.45	180	460	≥25
1LYQ(T)-320	0.6	200	510	25-40
1LYQ(T)-325	0.75	420	660	≥50
1LYQ(T)-425	1	480	660	80-100
1LYQ(T)-525	1.25	530	660	100-120
1LYQ(T)-625	1.5	570	660	120-160
1LYQ(T)-230	0.6	400	710	45
1LYQ(T)-330	0.9	460	710	55
1LYQ(T)-430	1.2	540	710	65



土豆收获机 Potato Auger

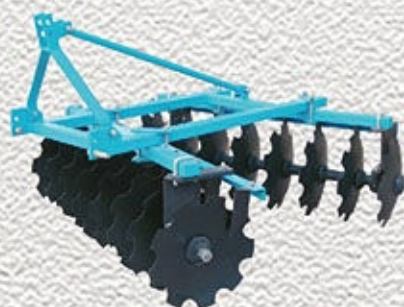


圆盘耙 Disc harrow ▶

Model	1BQX-1.1	1BQX-1.3	1BQX-1.4	1BQX-1.5	1BQX-1.7	1BQX-1.9	1BQX-2.3
Overall dimension(mm)	159*123*83	159*144*83	159*144*83	159*155*112	159*182*112	1700*2800*1125	2000*3300*1270
Working width(m)	1.1	1.3	1.4	1.5	1.7	1.9	2.3
Qty of disc	12	14	16	16	18	20	24
Disc diameter(mm)	460	460	460	460	460	460	460
Working depth(mm)	120	120	120	120	120	120	120
Overall weight(kg)	200	220	230	240	260	310	360
Fitted power(KW)	8.8	11	11	18.4	20.6	23	37
Linkage	3-point hitch	3-point hitch	3-point hitch	3-point hitch	3-point hitch	3-point hitch	3-point hitch



土豆种植机 Potato Planter

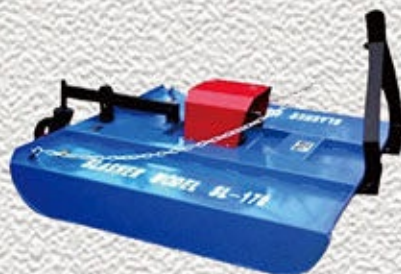

割草机 Mower ▶

Model	SL130	SL140	SL160	SL180
DIMENSIONS (L x W x H)	1300x1300x900mm	1400x1400x900mm	1600x1600x900mm	1800x1800x900mm
STRUCTURE WEIGHT	150kg	160kg	220kg	240kg
CUTTING WIDTH	124cm	134cm	154cm	174cm
WORKING EFFICIENCY	4000-10000m ² /h	4000-10000m ² /h	4500-10000m ² /h	4500-11000m ² /h
INPUT TURNING SPEED	540/min	540/min	540/min	540/min
PTO SPLINE	6x6x850	6x6x850	6x6x850	6x6x850
POWER REQUIRED	20-35hp	20-35hp	25-40hp	30-50hp



起垄机 Ridger

FARM IMPLEMENTS FOR TRACTOR



旋耕机 Rotary Tiller ➤

Model	1GN-125	1GN-150	1GN-160	1GN-180	1GN-200	1GN-220	1GN-250
Matched power (hp)	18-20	25-30	30-40	50-55	55-75	60-80	75-80
Working width(cm)	125	150	160	180	200	220	250
Working depth(cm)	Dry land	12-16	12-16	12-16	12-18	12-18	12-18
	Faddy field	14-16	14-16	14-16	14-20	14-20	14-20
No. of blades	26	34	38	50	54	58	62
Type of blade	IT225	IT225	IT225	IT245	IT245	IT245	IT245
Net weight (kg)	210	230	248	405	420	435	450
Width (mm)	1350	1600	1700	1900	2100	2300	2600
Depth (mm)	900	900	900	1020	1020	1020	1020
Height (mm)	1000	1000	1000	1152	1152	1152	1152
Linkage	3-point hitch	3-point hitch	3-point hitch	3-point hitch	3-point hitch	3-point hitch	3-point hitch



搂草机 Hay Rake



拖车 Trailer ➤

Model	7CX-5	7CX-6	7CX-8	7CX-10
Cart size(mm)	4000*2150*400	4200*2150*400	5300*2150*500	5600*2150*600
Outside dimension(mm)	5800*2250*1850	6300*2250*1950	7100*2250*2050	7300*2250*2250
loading capacity	5 ton	6 ton	8 ton	10 ton
Dry mass	1200kgs	1400kgs	2300kgs	3200kgs
Brake forms	Air brake	Air brake	Air brake	Air brake
match power	30-60hp	30-60hp	50-100hp	80-150hp



挖穴机 Post Hole Digger



平地机 Box Blade ➤

Model	Shanks	Hitch	Fit power(Hp)	Weight(kg)	宽度 (cm)
BB48	4	Cat I	25-30	180	101.6
BB60	5	Cat I	30-40	221	127
BB72	6	Cat I	40-55	240	152.4
BB84	7	Cat II	55-70	268	177.8
BB96	8	Cat II	75	296	203.2



弥雾机 air mist sprayer



前装载 Front End Loader ➤

Model	TZ-3	TZ-4	TZ-8	TZ-10
Power Matched(hp) 匹配动力	20-40	45-60	70-90	95-125
Max.Lift Height (mm) 提升高度	2100	2400	2700	3020
Max.Dump Reach (mm) 倾卸范围	600	800	930	1020
Max.Dump Angle (deg) 倾卸角度	42	42	42	42
Rated Load (kg) 额定载重	260	360	600	800
Bucket Capacity (cub.m) 铲斗容量	0.2	0.32	0.46	0.6
Max.Digging Depth (mm) 最大挖掘深度	100	100	110	130
Bucket Width (mm) 铲斗宽	1300	1400	1500	1600
Load Lift Time (s) 负荷提升时间	'6-9	'6-9	'6-9	'6-9
Load Decline Time (s) 负荷下降时间	3	3	4	5



打捆机 Baler


山东潍坊鲁中拖拉机有限公司
SHANDONG WEIFANG LUZHONG TRACTOR CO., LTD.

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China
Tel: +86-536-8325538 8325528 Fax: +86-536-8325538
Home: chinaluzhong.en.alibaba.com http://www.luzhongtlj.com
E-mail: chinaluzhong@luzhongtlj.com

公司荣誉

Company honor



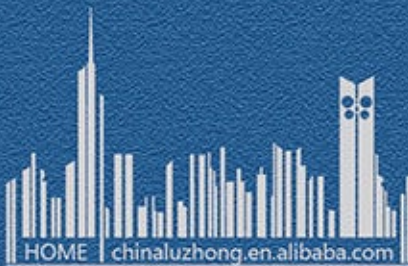

2789 Caihong Rd. Weicheng Dist., Weifang City, Shandong Province, P. R. China

Tel: +86-536-8325538 8325528 Fax: +86-536-8325538

Home: chinaluzhong.en.alibaba.com <http://www.luzhongtlj.com>

E-mail: chinaluzhong@luzhongtlj.com